



EL410

For narrow stile doors,
with single action bolt,
fail locked

Bolt collapses when
power on

HIGH SECURITY ★★★★★




EL411

For narrow stile doors,
with single action bolt,
fail unlocked

Bolt collapses when
power off

HIGH SECURITY ★★★★★

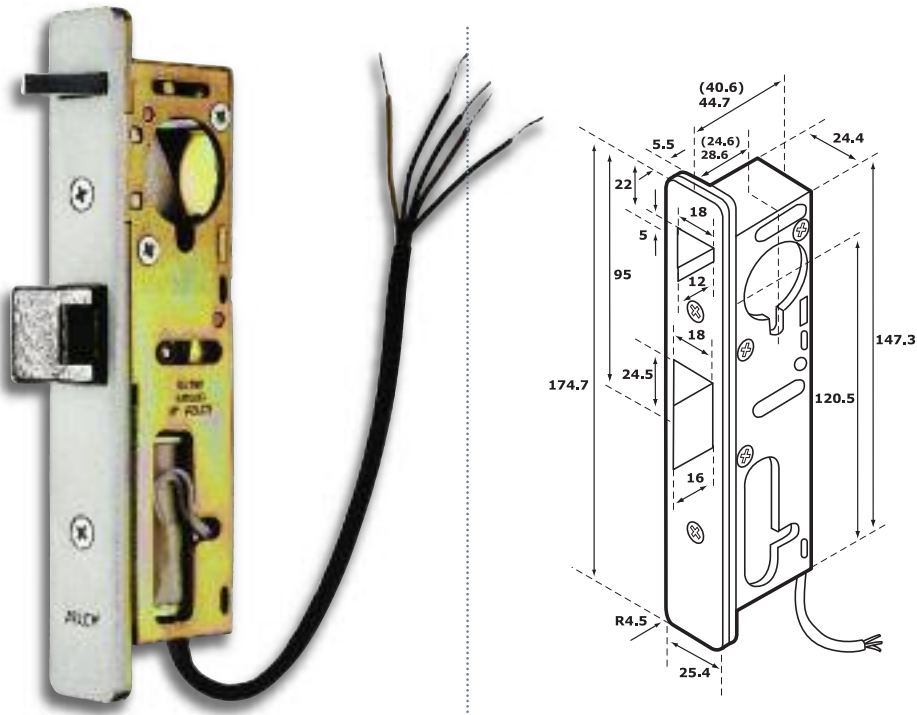

Features

- Bolt deadlocks when door closes
- Bolt collapses into lockcase as door is opened (push or pull)
- Inside handle operates at all times
- Key override at all times

Monitoring

- Bolt position locked and unlocked



TECHNICAL SPECIFICATION	EL410	EL411
Operating voltage +15%, -10% ±15%	12V DC stabilised 24V DC stabilised	12V DC stabilised 24V DC stabilised
Current max		
12V DC	0.4A	0.4A
24V DC	0.2A	0.2A
Temperature (°C)	-35 to +66	-35 to +66
Backset (mm)		
Standard	24.6	24.6
Special	28.6	28.6
Forend (mm)		
Standard	25.4	25.4
Forend finish	Satin Chrome	Satin Chrome

ACCESSORIES	EL410	EL411
Cylinder double	—	—
Cylinder single	CY404	CY404
Strike	4610(inc) Flat 4	4610(inc) Flat 4
Handles (Paddle)	4591	4591
Threaded thumbturn	4067-SAA	4067-SAA

NB. Unless otherwise stated all electro-mechanical lockcase cylinders will be supplied as ABLOY PROTEC.

For handles please see pages 24-27.