



EL466

Multipoint solution

For narrow stile doors, with antifriction bolt, fail locked/fail unlocked.

Outside handle controlled

Meets EN1125 when used with 990001-SE panic bar

HIGH SECURITY ★★★★



EL467


Multipoint solution

For narrow stile doors, with antifriction bolt, fail locked/fail unlocked.

Both handles electrically controlled

HIGH SECURITY ★★★★



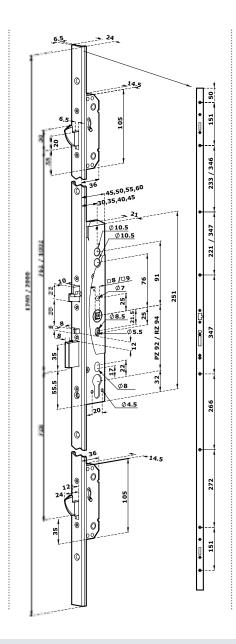

Features

SOLENOID LOCKS

- Easily reversible trigger bolt, suitable for all hands of door
- · Quick change fail locked to fail unlocked
- Deadbolt and ant-friction bolt deadlock when door closes
- Inside handle operates at all times
- Meets EN179 for emergency exit doors and EN1634-1 for fire resistance (when used with correct exit hardware)
- · Tested to mechanical resistance EN12209
- · Key override at all times

Monitoring

- Request to exit (RQE) on inside handle (EL466)
- Bolt position
- Door position
- Cylinder operation

Fitting

• For wooden doors please add 10mm to lockcase height above fitting to allow for cable socket and plug



TECHNICAL SPECIFICATION	EL466
Operating voltage +15%, -10%	12V DC to 24V DC stabilised
Current max 12V DC 24V DC	350mA 250mA
Temperature (°C)	-20 to +60
Backset (mm) Standard Special	30, 35 40, 45
Forend (mm) Standard Special	24 28
Follower (mm)	9
Split spindle (mm)	8
Forend finish	SSS

ACCESSORIES	EL466	
Cylinder single	CY326/CY321 CY336/CY331	
Cylinder and turn	_	
Strike (included)	EA322 and 2 x EA306	
Handles (Futura) (Inoxi)	60-0819 3-19X/013PZ+PZ-SSS	
Cable (included)	EA218 (inc)	
Spindle converter (8-9mm) included	807227	

NB. Unless otherwise stated all electro-mechanical lockcase cylinders will be supplied as ABLOY PROTEC

SSS: Satin stainless steel.

For handles please see pages 24-27.

EN1125 solution	EL466	New
Panic bar	990001-SE	Hoddet
	b	